

THE MEASURABLE DIFFERENCE.



DEWETRON

▼

OXYGEN Training > TRION3-AOUT-8 Support





5 different output modes available

- ① Monitor Output
(supported by TRION3-18x0-MULTI-AOUT-8 only)
- ② Math Output
(supported by TRION3-18x0-MULTI-AOUT-8 only)
- ③ Constant Output
(supported by TRION3-AOUT-8 and TRION3-18x0-MULTI-AOUT-8)
- ④ Function Generator
(supported by TRION3-AOUT-8 and TRION3-18x0-MULTI-AOUT-8)
- ⑤ Stream Output aka File Replay
(supported by TRION3-AOUT-8 and TRION3-18x0-MULTI-AOUT-8)

- This presentation will explain the software functions for the TRION3-AOUT-8 module in OXYGEN.
- In order to use some functionalities, the TRION3-AOUT-8 in combination with a TRION3-18xx-MULTI (TRION3-18x0-MULTI-AOUT-8) is required
- Requires OXYGEN R5.4 and TRION Applications R5.4 or higher
- TRION3-AOUT boards provide the following two functions:
 - Conditioned signal output
 - Calculated channel output
- Conditioned Signal Output
 - A direct or processed output of each conditioned analog input of the TRION3-18x0-MULTI is available here. This can be an analog signal as direct output or RMS or average value for the same ranges as processed output.
- Calculated channel output
 - Any channel or the TRION3-18x0-MULTI can be used for basic calculations on the FPGA
- Voltage or current output is available for both functions with the following ranges:
±5 V, ±10 V, 0 - 5 V or 0 - 10 V ±30 mA, 0 - 30 mA



DEWETRON


CHANNEL SETUP - OVERVIEW

① Click on the gear button to access the Channel Setup


② Output Amplifier Options. Selection of
- Mode
- Range
- Output Mode
- LP Filter

③ Includes specific settings depending on the Channel Mode

④ Includes the scaling information from Input to output
Can be edited by changing the reference channel's input range or the output channel's range

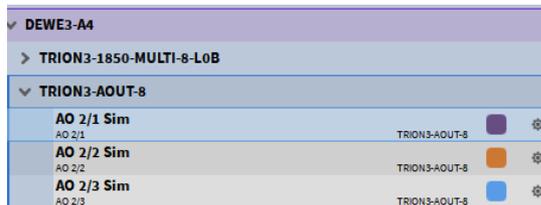

①

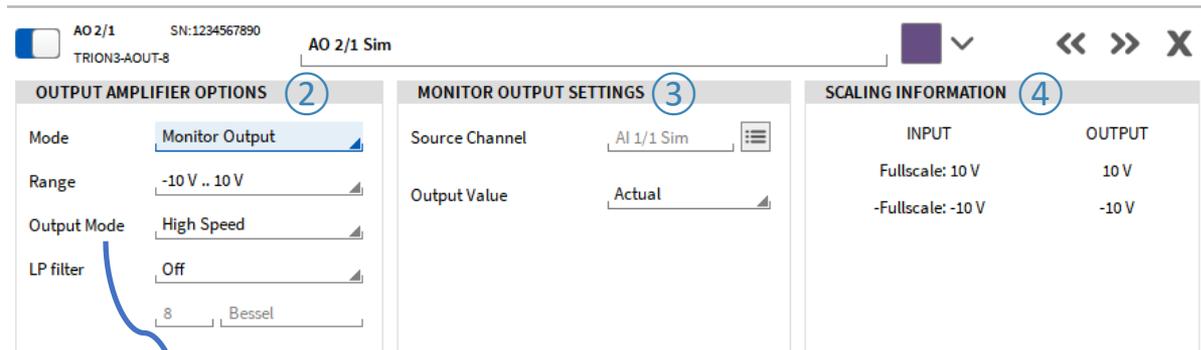

②

③

④

Output Mode	High-speed Mode	High-resolution Mode
Update Rate	2.5 MS/s	500 ks/s
Resolution	16 bit	32 bit
Latency	< 5 μ s	< 100 μ s

CHANNEL SETUP – MONITOR OUTPUT SETTINGS



DEWETRON

© DEWETRON GmbH | January 23

- 1 Select the reference input channel which shall be output
- 2 Select the output value Actual, Average or RMS
- 3 In case output value is *Average* or *RMS*, a *Moving* or *Fixed Window Type* can be selected
- 4 Calculation Window can be set from 1 ... 1000 ms

AO 2/1 SN:1234567890
TRION3-AOUT-8 AO 2/1 Sim

OUTPUT AMPLIFIER OPTIONS		MONITOR OUTPUT SETTINGS		SCALING INFORMATION	
Mode	Monitor Output	Source Channel	AI 1/1 Sim	INPUT	OUTPUT
Range	-10 V .. 10 V	Output Value	Actual	Fullscale: 10 V	10 V
Output Mode	High Speed			-Fullscale: -10 V	-10 V
LP filter	Off				
	8 Bessel				

MONITOR OUTPUT SETTINGS

Source Channel AI 1/2 Sim

Output Value Average

Window Type Moving

Calculation Window 1000 ms

- Monitor output provides the same functionality as a signal conditioner
- If *Output Value* is *Average* or *RMS*, the calculations will be done on the board's FPGA to ensure minimum latency times



DEWETRON

CHANNEL SETUP – MATH OUTPUT

- 1 Select the reference input channels
- 2 Select the Mathematical operation $A+B$, $A-B$ or $A*B$
- 3 Select the output value Actual, Average or RMS
- 4 In case output value is *Average* or *RMS*, a *Moving* or *Fixed Window Type* can be selected
- 5 Select the output value Actual, Average or RMS
Calculation Window can be set from 1 ... 1000 ms

AO 2/2 SN:1234567890
TRION3-AOUT-8 AO 2/2 Sim

OUTPUT AMPLIFIER OPTIONS		MATH OUTPUT SETTINGS		SCALING INFORMATION	
Mode	Math Output	Source Channel A	Al 1/2 Sim	INPUT	OUTPUT
Range	-10 V .. 10 V	Source Channel B	Al 1/2 Sim	Fullscale: 100 V	10 V
Output Mode	High Resolution	Math Operation	A+B	-Fullscale: -100 V	-10 V
LP filter	Off	Output Value	Actual		
	8 Bessel				
		Output Value	Average		
		Window Type	Moving		
		Calculation Window	1000 ms		

- Math Output can be used to output the sum, difference or product of two reference input channels
- The calculations will be done on the board's FPGA to ensure minimum latency times



DEWETRON

CHANNEL SETUP – CONSTANT OUTPUT

① Select the desired constant value

AO 2/2 SN:1234567890
TRION3-AOUT-8 AO 2/2 Sim

OUTPUT AMPLIFIER OPTIONS		CONSTANT VALUE OUTPUT SETTINGS	
Mode	Const Output	Source channel A	CONST1
Range	-10 V.. 10 V	Constant value	① 10 V
Output mode	High Resolution		
LP filter	Off		
	8 Bessel		

- Constant Output can be used to output a constant reference value within the selected channel Range



DEWETRON

CHANNEL SETUP – FUNCTION GENERATOR

- 1 Select the desired waveform: Sine, Square, Triangle or a customized pattern
- 2 Select the desired signal frequency from 1 mHz to 1 MHz
- 3 Select the signal amplitude from 0 ... 10 V or 0 ... 30 mA as *Peak* or *RMS* value
- 4 Select a signal offset within the output range
- 5 Select a phase shift from -180° ... 180°
- 6 Select a Duty cycle from 0.01 ... 100%
Only available from Square and Triangular signals

AO 2/1 SN:1234567890
TRION3-AOUT-8 AO 2/1 Sim

OUTPUT AMPLIFIER OPTIONS	FUNCTION GENERATOR OUTPUT SETTINGS	CUSTOM WAVEFORM STORE
Mode: Function Generator	Waveform: 1 Square	Waveforms are shared per module.
Range: -30 mA .. 30 mA	Frequency: 2 1000 Hz	0 1.0 -1.0 Click or drop waveform file here
Output Mode: High Resolution	Amplitude: 3 1 mA	1 1.0 -1.0 Click or drop waveform file here
LP filter: Off	Peak: 4 0 mA	2 1.0 -1.0 Click or drop waveform file here
8 Bessel	Offset: 5 0 deg	3 1.0 -1.0 Click or drop waveform file here
	Phase: 6 50%	
	Dutycycle: 6 50%	

- Function generator provides the ability to output different predefined waveforms or customized patterns
- The calculations will be done on the board's FPGA to ensure minimum latency times



CHANNEL SETUP – CUSTOM WAVEFORM PATTERNS

- Instead of a predefined Sine, Rectangular or Triangular, a customized waveform can be used
- 4 customized waveforms are shared by the entire module
- Waveforms are stored to the dms-setup file
- One waveform can be selected per channel

The screenshot shows the software interface for channel setup. It includes three main panels:

- OUTPUT AMPLIFIER OPTIONS:** Mode (Function Generator), Range (-10 V .. 10 V), Output Mode (High Resolution), LP filter (Off, 8, Bessel).
- FUNCTION GENERATOR OUTPUT SETTINGS:** Waveform (PATTERN0), Frequency (100 Hz), Amplitude (1 V), Offset (0 V), Phase (0 deg).
- CUSTOM WAVEFORM STORE:** A list of four waveforms (0, 1, 2, 3) with corresponding plots. Waveform 0 is selected. The plots show various waveforms: a sine wave, a square wave, a triangular wave, and a sawtooth wave.

① Select the desired pattern in the waveform dropdown or select the desired waveform directly in the custom waveform menu

② Load a waveform by dragging and dropping the file into the respective waveform field or by clicking on the field to open a dialog window

③ The defined waveform corresponds to one period and will be repeated periodically. Output rate can be defined by using the Frequency selection

- The waveform file must fulfill the following demands:
 - The file must be a .csv format (④)
 - Each row is one value or sample
 - Only values between -1 and 1 are allowed
 - The signal will be scaled according to the selected Amplitude (⑤)
 - The separator must be a . (dot)
 - A maximum of 16384 rows are allowed

```

waveform1.csv
Datei Bearbeiten
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0
  
```



CHANNEL SETUP - STREAM OUTPUT

- The Stream Output functionality can be used to output scalar channels via the analog output channels of the TRION3-AOUT board, this is also possible with channels of a previously recorded OXYGEN file.
- To use this option, the software must be in *LIVE* (data acquisition) or *REC* mode
- This mode is not supported in *PLAY* mode

OUTPUT AMPLIFIER OPTIONS

Mode	StreamOutput ①
Range	-10 V .. 10 V ②
Output Mode	High Speed
LP filter	Off
	8 Bessel

- ① To enable this mode enable *Stream Output* in the output amplifier options of each channel that shall be used for data output
- ② The output signal (voltage or current) and its range can be specified



DEWETRON

OUTPUT CHANNEL INSTRUMENT FOR CONST OUTPUT AND FUNCTION GENERATOR

- Const Output Channels and
- Function Generator Channels can be displayed and changed on the measurement screen

① The Output Channel instrument can be found in the Instruments menu and can be dragged and dropped to the measurement screen

② Selecting the output channels from the channel list will display them in the Output Channel instrument. The const value can be changed via the slider or the numeric input field. The function generator can be customized via drop-down-menus

The screenshot displays the DEWETRON software interface. On the left, a measurement screen shows a waveform. On the right, the 'Instruments' menu is visible, listing various measurement tools. A blue box highlights the 'Output Channel' instrument in the menu, with a blue arrow pointing to a callout window. This callout window, labeled '②', shows the configuration for the 'AO 6/1 Sim [V]' instrument. It includes a 'Waveform' dropdown set to 'Sine', 'Frequency' set to '1 kHz', 'Amplitude' set to '1 V', 'Peak' set to 'Peak', 'Offset' set to '0 V', and 'Phase' set to '0 deg'. To the right of these settings is a 'Constant value' section with a slider and a numeric input field set to '5 V'. A blue box labeled '①' highlights the 'Output Channel' icon in the Instruments menu.



DEWETRON


OUTPUT CHANNEL INSTRUMENT FOR STREAM OUTPUT

- A separate Instrument exists for loading the desired data file that shall be replayed
- This Output Channel instrument is also used to assign the channels that shall be output from the data to the respective Analog Output channel

① The Output Channel instrument can be found in the Instruments menu and can be dragged and dropped to the measurement screen

② The analog output channels that shall be used for data replay must be assigned to the Output Channel instrument.

The channel's output mode must be set to Stream output.

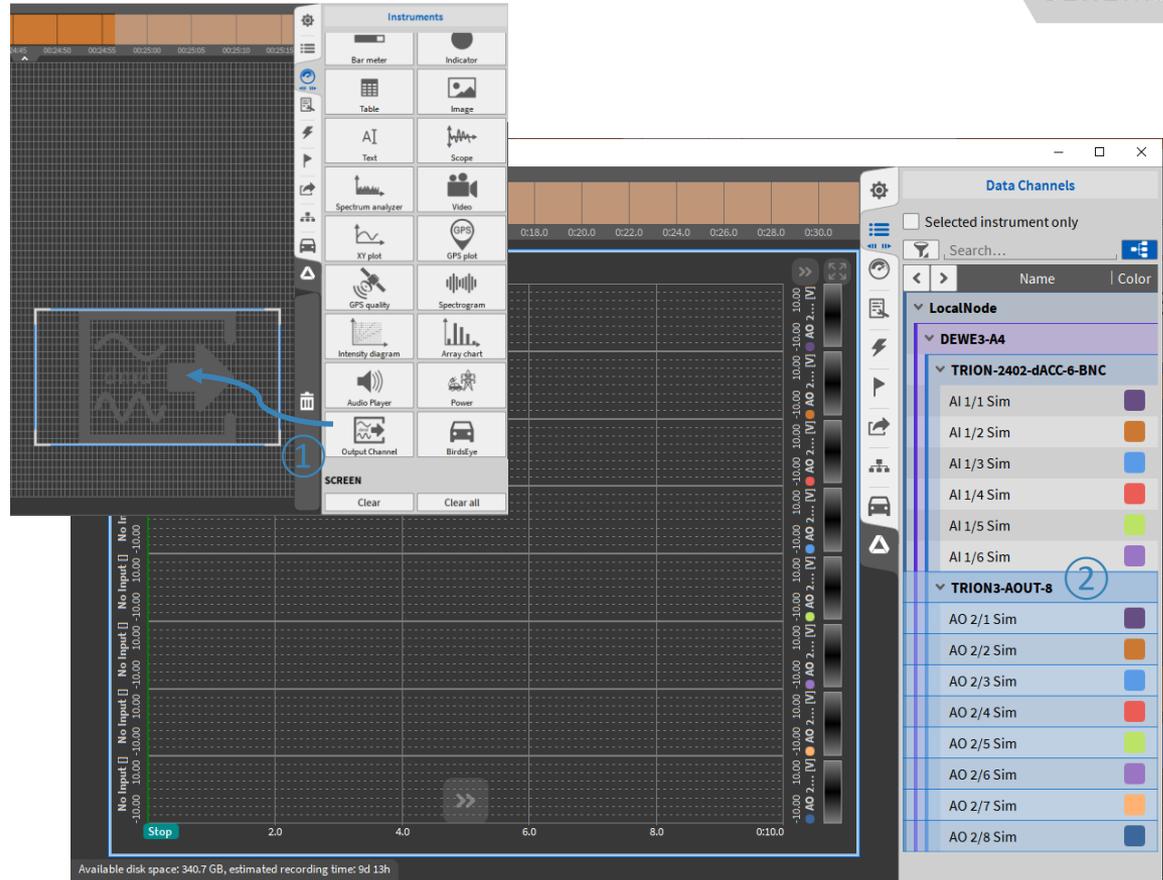


Available disk space: 340.7 GB, estimated recording time: 9d 13h



DEWETRON

OUTPUT CHANNEL INSTRUMENT PROPERTIES

- 1 Load the data file to be replayed
- 2 Assign the input channel to the output channel
- 3 Change the output scaling factor
- 4 Change the output offset
- 5 Loop the playback
- 6 Use the cursors to replay only a certain data file part
- 7 Start / Stop and pause the playback
- 8 Playback mode "Replay" is used to play back channels of a previously recorded OXYGEN file. Playback mode "Live" is used to play back scalar channels of the current measurement, no data is displayed in the instrument. In "Live" mode, the instrument is only used to set the channels to be transmitted, which are directly output as AOUT channels.

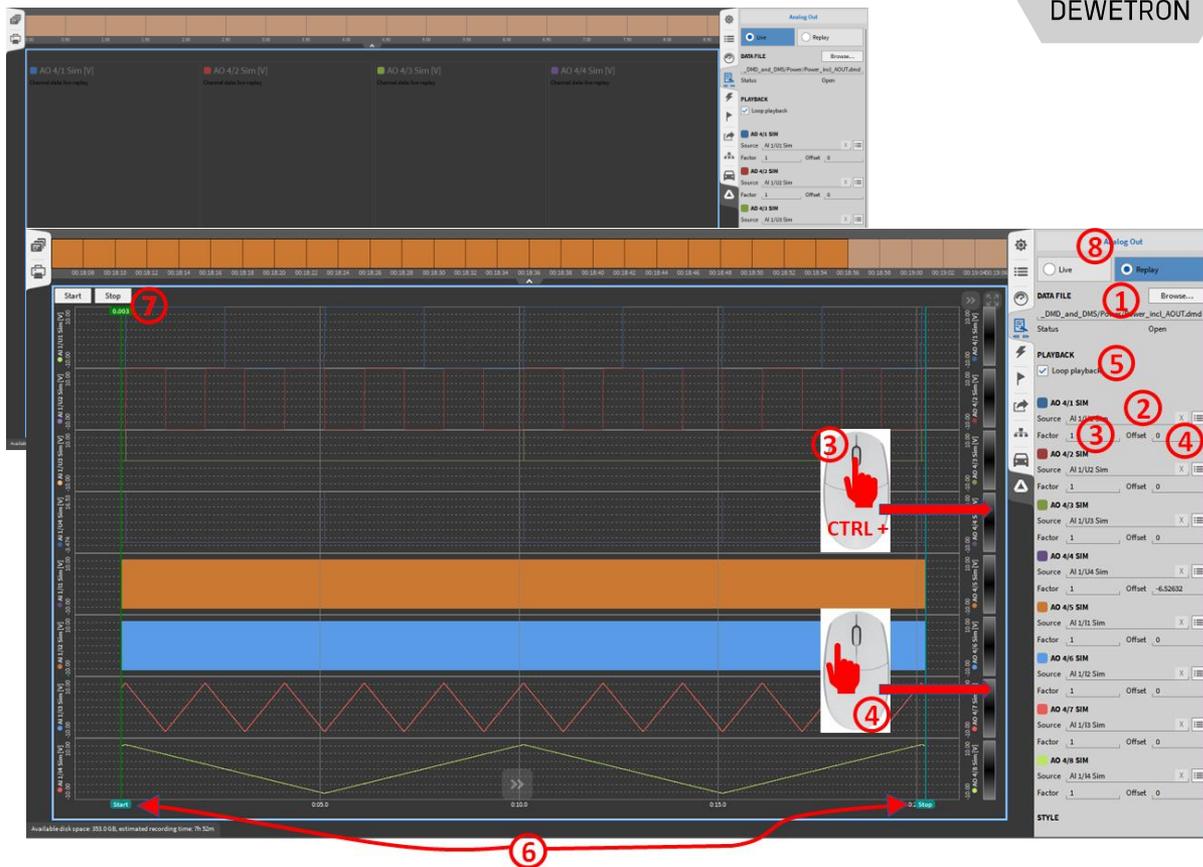




OUTPUT RATE VS SAMPLE RATE

① The output rate (sample rate of the D/A converter) is only depending on the selected output mode.

High Speed mode corresponds to 2.5 MS/s

High Resolution mode corresponds to 500 kS/s

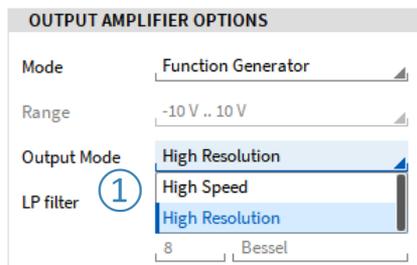

② The output channels can also be stored to the dmd-file. The sample rate for storing the channels can be selected in the *Sample Rate* column of the Channel List

Channel	Color	Active	Stored	Scaled Value	Mode	Sample Rate
LocalNode						
DEWE3-A4						
TRION3-1820-MULTI-8-LoB						
TRION3-AOUT-8 (2)						
AO 2/1 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-0.0000000	AVG	10000 Hz
AO 2/2 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.0406436	AVG	10000 Hz
AO 2/3 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-5.9999996	AVG	10000 Hz
AO 2/4 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	5.1999997	AVG	10000 Hz
AO 2/5 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-2.7999998	AVG	10000 Hz
AO 2/6 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-6.9999996	AVG	10000 Hz
AO 2/7 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.0000000	AVG	10000 Hz
AO 2/8 Sim	TRION3-AOUT-8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.0000000	AVG	10000 Hz